


呼径	外径 OD	内径 ID	A	B	全長 L	摘要
8A	13.8	10.5	34	27.5	17	
10A	17.3	14	34	27.5	17	
15A	21.7	17.5	34	27.5	17	
1.0S	25.4	23	50.5	43.5	21.5	
1.25S	31.8	29.4	50.5	43.5	17	
1.5S	38.1	35.7	50.5	43.5	17	
2.0S	50.8	47.8	64	56.5	21.5	
2.5S	63.5	59.5	77.5	70.5	21.5	
3.0S	76.3	72.3	91	83.5	21.5	
3.5S	89.1	85.1	106	97	21.5	
4.0S	101.6	97.6	119	110	28	

摘要

型番	NCLF-W	承認	審査	作成
品名	溶接式ヘルール			
材質	SUS304(1S以上)、SUS316L			
作成	21.05.29			

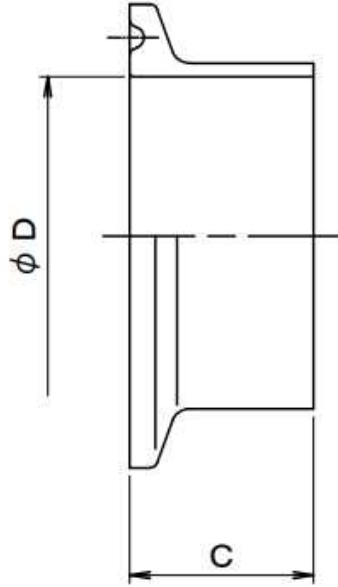

呼径	内径 φD	全長 C	摘要
8A	10.5	17.3	
10A	14	17.3	
15A	18.4	17.3	
1S	23	20.5	
1.5S	35.7	20.5	
2S	47.8	20.5	
2.5S	59.5	20.5	
3S	72.3	20.5	
3.5S	85.1	20.5	
4S	97.6	20.5	
4.5S	108.3	27	
5S	133.8	27	
6S	159.2	27	

摘要

型番	NL14AMD CD-1	承認	審査	作成
品名	溶接用ヘルール			
材質	SUS304 (1S以上)、SUS316L			
作成	21.05.29			

